


LTE 12 Way IR Pass Amplifier

Art. Number 334025

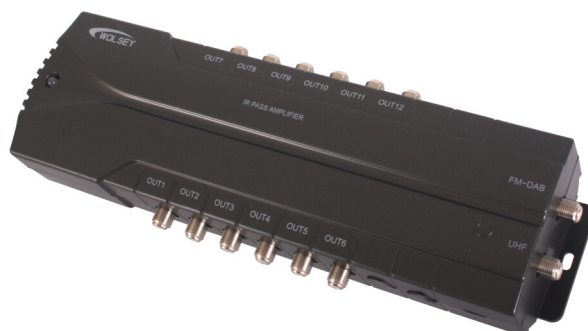

- Distributes to multiple TV's around the home
- Allows control of Sky Digital receivers when used with TRIAX Digital Links
- 2 Input 12 Output
- Short circuit protected on each output
- Power on LED
- Screened housing
- F-Connectors
- Easy to mount fixing
- Mains powered
- 9VDC/15mA on outputs

Technical Specifications

ORDER INFORMATION

EAN Number 5702663340251

FREQUENCY RANGE

| | |
|------------------------------|----------------|
| Output frequency range MHz | 85...790 MHz |
| Frequency range UHF MHz | 470-790 MHz |
| Frequency Range FM MHz | 87.5...108 MHz |
| Frequency Range DAB MHz | 217...230 MHz |
| Frequency range VHF MHz | 85...230 MHz |

GAIN

| | |
|-------------------|------------|
| Gain dB | 10 +/-2 dB |
| Noise figure dB | <5 dB |

ELECTRICAL

| | |
|----------------------|-------------|
| Impedance Ω | 75 Ω |
|----------------------|-------------|

OPERATIONAL

| | |
|-------------------------|--------------------------|
| AC Supply voltage VAC | 230 \pm 10% / 50Hz VAC |
|-------------------------|--------------------------|

CONNECTORS



Technical Specifications

| | |
|-------------------|----|
| Number of inputs | 2 |
| Number of outputs | 12 |

MECHANICAL

| | |
|-----------------------|---|
| Colour | RAL 7016 - Anthracite grey |
| Packing QTY | 1 |
| Packaging Height m | 0.000 m |
| Packaging Width m | 0.000 m |
| Packaging Depth m | 0.000 m |
| Packaging Volume m3 | 0.001 m3 |
| Net Weight kg | 0.690 kg |
| Tara Weight kg | 0.210 kg |
| Total Weight kg | 0.900 kg |
| Remarks | Fully screened within plastic housing >25dB rejection at 821MHz Short circuit protection on outputs |