TiOC HOW TO GUIDE

Setting up the Face Mask Function

For a Camera-only System

The following guide enables you to set up the Face Mask Detection Function on **Wiz Sense** (Series 3) and **Wiz Mind** (Series 5 & 7) camera-only systems.

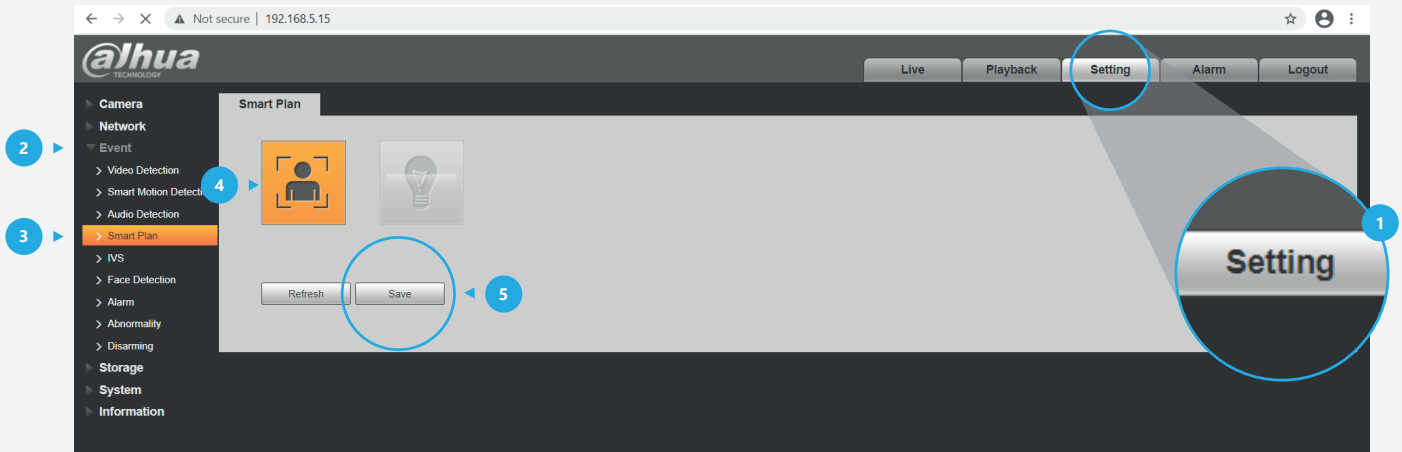| Series	Examples
DH-IPC-HF/HFW/HDW/HDBW3X4X Series	HFW3549T1-AS-PV
DH-IPC-HF/HFW/HDW/HDBW5X4X Series	HDW5241TM-ASE
DH-IPC-HF/HFW/HDW/HDBW7X4X Series	HFW5242H-ZE
	HDBW7442H-Z

System Version: *V2.800.00AD000.0.R*
Build Date: *2020-07-29*

NB: The firmware version is based on the latest version when this document was created and may slightly differ from future versions, however this will not affect any of the functions.
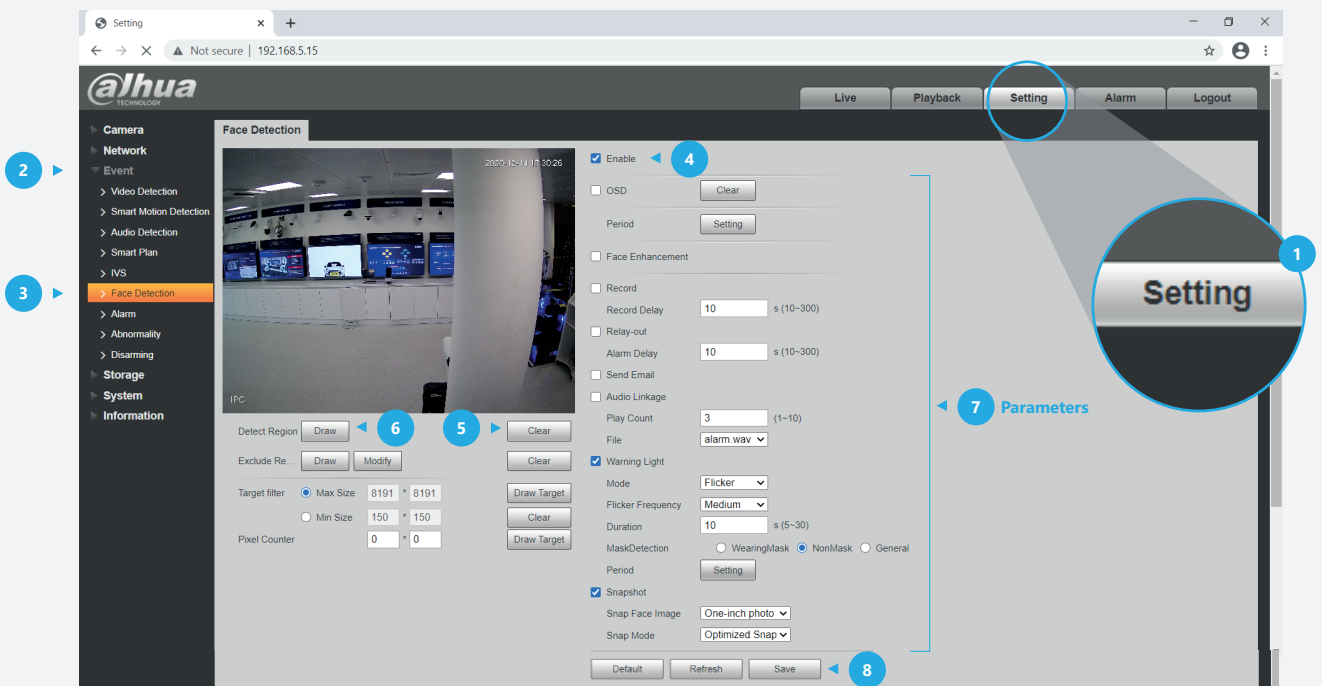
Step 1: Log in to the camera, go to Setting > Event > Smart Plan , *click* Face Detection to activate the function and *click* Save .

Step 2: Go to Setting > Event > Face Detection , *tick* the ☑ **Enable** check box on the top right hand corner to enable the function.

By default the detection area will be set to full screen, if you wish to change the detection area, *click* Clear *button first and then Click* Draw button on the left hand side and draw inside live preview the shape of the target area for face detection and set the parameters.

Click Save at the bottom right hand corner to complete.

Step 3: To check the face detection alarm record details *click* Alarm in the top right hand corner and *tick* ☑ **IVS** under the Alarm Type .

> **NB:** The alarm records will not be kept after logging out. To check if the alarm function is still operating normally once logged out, please trigger another alarm.

If you still encounter problems operating your Dahua device, please call **+44 (0)1628 613 500**